



#### VERSATILITY

OPL <> SELF  
SINGLE <> STACKED

Can be stacked with a WPR washer or another DPR dryer

Reversible control panel

Suitable for many sectors: restaurants, hotels, gyms, campings, laundromats, nurseries, facility services (mops)...



#### FEATURES

EASY TOUCH 2: user friendly and fully programmable microprocessor with a 4,3" touch screen

USB connection

Remote WiFi connection

Reduced drying time (less than 45 minutes)

Heating: 6,75 kw, option 4,5 kw



#### EFFICIENCY

Improved airflow system

Big fluff filter as drawer

Stacked machines: control panel can be inverted to the bottom for better ergonomics



#### ROBUSTNESS

Outer casing in grey skinplate

Sturdy door made in aluminium

Drawer as fluff filter: not in the door

Industrial fan and powerfull airflow

Sturdy construction of the structure and panels



#### OTHERS

Transmission by pulley and belt

Galvanized drum

Axial airflow

Big door diameter: 588 mm

Integrated COOL DOWN: anti-wrinkle at the end of drying cycle

Electric heating


CE approved



## OPTIONS

- CARE DRY : humidity control
- Reversible door opening
- AISI 304 stainless steel outer casing
- AISI 304 stainless steel drum
- Control panel in the bottom (stacked dryer)
- Danube Online communication kit
- Tropicalized model: protected board
- Ergonomic plinth (improved loading height)
- Coiner kits: coins/tokens + box, central pay
- Marine tension 440V III 60 Hz without neutral
- Tensions 400V / 230 V I/III 50/60 Hz

TECHNICAL DATA	UNIT.	DPR-8 ET2	DPR-10 ET2
<b>DRUM</b>			
Capacity 1:20	Kg	8	10
Volume	l	160	200
Diameter	mm	590	590
Depth	mm	585	690
<b>GENERAL DATA</b>			
ET2 control	-	4,3" touch screen	4,3" touch screen
USB connection	-	Yes	Yes
Construction	-	Skinplate panels	Skinplate panels
Plinth	-	Opt	Opt
Sound level	dB	62	62
Coin laundry version	-	Yes	Yes
<b>DOOR</b>			
Height center door	mm	554	554
Height base door	mm	250	250
Diameter	mm	480	480
<b>POWER</b>			
Motor	kW	0,37	0,37
Electric heating	kW	4,5 / 6,75	4,5 / 6,75
<b>CONNECTIONS</b>			
		<b>ELECTRIC</b>	<b>ELECTRIC</b>
Tension 230V I + N + T 50 Hz	N° x mm2 / A	3 x 10 / 40A	3 x 10 / 40A
Tension 230V III + T 50 Hz		4 x 4 / 25A	4 x 4 / 25A
Tension 400V III + N + T 50 Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Tension 230V I + N + T 60 Hz		3 x 10 / 40A	3 x 10 / 40A
Tension 230V III + T 60 Hz		4 x 4 / 25A	4 x 4 / 25A
Tension 400V III + N + T 60 Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Tension 440V III + T 60 Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Tension 480V III + T 60 Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Exhaust diameter	mm	100	100
Maximum airflow	m3/h	300	300
<b>DIMENSIONS / PACKING DIMENSIONS</b>			
Net width / Gross width	mm	680 / 710	680 / 710
Net depth / Gross depth	mm	722 / 832	775 / 832
Net height / Gross height	mm	1.056 / 1.141	1.056 / 1.141
Net weight / Gross weight	kg	89 / 100	93 / 104
Volume	m3	0,67	0,67

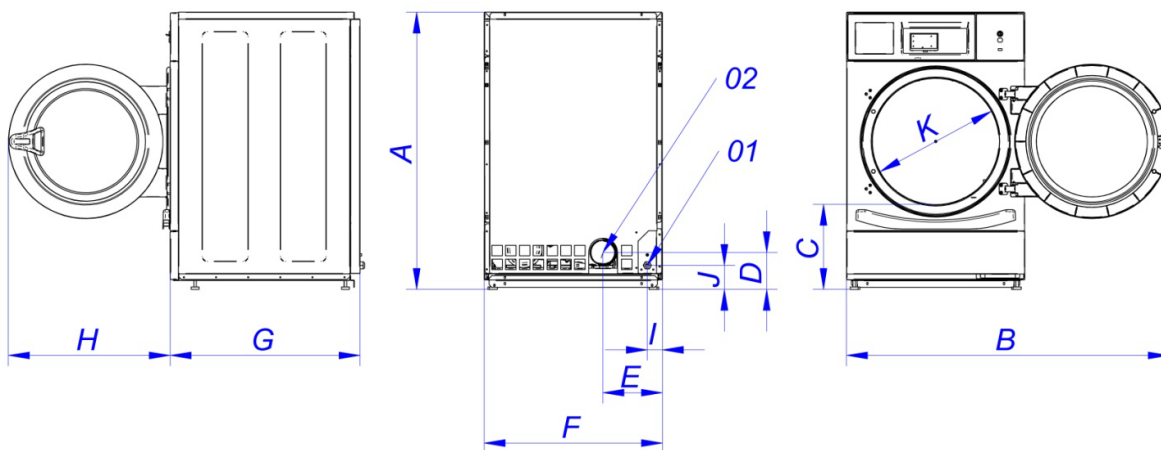

01 ELECTRICAL CONNECTION  
02 EXHAUST Ø 100

	A	B	C	D	E	F	G	H	I	J	K
DPR-8	1.056	1.227	320	140	226	680	722	615	57	91	480
DPR-10	1.056	1.227	320	140	226	680	775	615	57	91	480